



HYTORC EDGE-S HYDRAULIC TORQUE WRENCH

Affordable ratchet-type hydraulic torque wrench with simple design

- Unlike the ICE model, the reaction arm is attached to the rear of the frame
- Easy tool positioning thanks to the 360° × 180° rotating connection system
- Fine-tooth gear mechanism
- Specifically designed for maintenance applications
- Includes a calibration certificate
- Includes a removable support handle
- Delivered in a carrying case

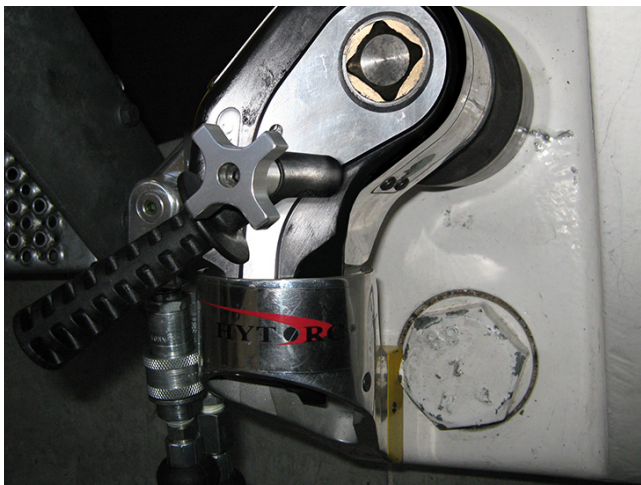

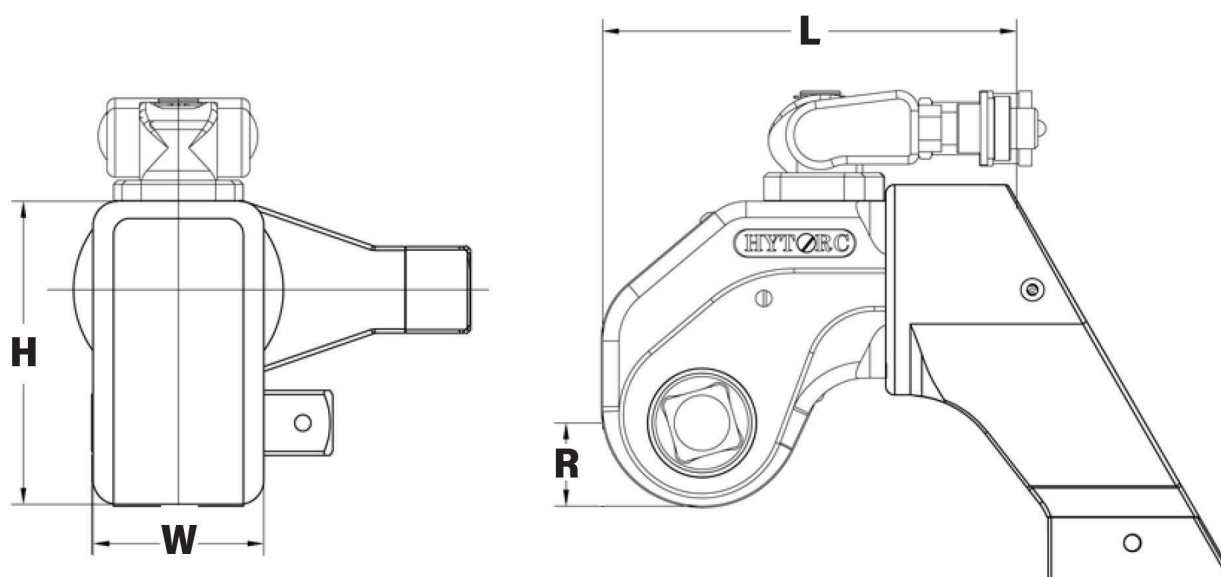

MODELS AND DIMENSIONS

Item	Drive	Torque range Nm	R mm	L mm	H mm	W mm	Weight kg
EDGE-1S	3/4"	241 - 1 703	25	125	90	50	1,8
EDGE-3S	1"	600 - 4 172	33	163	120	67	3,9
EDGE-6S	1 1/2"	1 210 - 8 457	40	193	153	81	8,7
EDGE-9S	1 1/2"	1 667 - 11 592	47	221	167	91	9,1
EDGE-11S	1 1/2"	2 188 - 15 299	50	244	180	100	11,4
EDGE-30S	2 1/2"	6 027 - 40 194	71	348	257	143	29,4

REMOVABLE DRIVE



The direction can be changed by flipping the quick-release drive to the other side.

SIMPLE DESIGN



The EDGE-S wrench's three-part structure makes it easy to use and maintain.

WIDE RANGE OF ACCESSORIES



The EDGE-S wrench package includes a support handle to facilitate operation. Additionally, a variety of accessories are available, such as special support arms and hexagon socket drivers.

ACCESSORIES

HYDRAULIC TORQUE WRENCHES

REACTION ARMS AND SOLUTIONS



1



2



3



4



5



6



7



8



9



10



11



12

Number	Description	Compatibility
1	Square drive type reaction arm	MXT+ / ICE / AVANTI
2	360° x 360° rotatable reaction arm	MXT+ / ICE / AVANTI
3	Standard reaction arm	MXT+ / MXT / EDGE-S
4	Reaction sleeve	MXT+ / MXT / EDGE-S
5	Track pad fixture	MXT+ / ICE / AVANTI
6	Washer driver socket	MXT+ / ICE / AVANTI
7	HYTORC Nut driver	MXT+ / ICE / AVANTI
8	Alco arm	MXT+ / MXT / EDGE-S
9	U-shaped reaction arm	MXT+ / ICE / AVANTI
10	Reaction pad	STEALTH / VERSA / XLCT
11	Alco arm	STEALTH / VERSA / XLCT
12	Welding adapter	MXT+ / ICE / AVANTI

DUAL HYDRAULIC HOSES

- Hose working pressure: 700 bar
- High-visibility color ensures visibility even in poor conditions
- Hose lengths can be customized according to customer specifications, starting from 0.5 m
- All hoses, wrenches, and pumps can be equipped with connectors according to customer requirements
- Standard lengths (m): 5, 6, 8, 10, 12, 16
- Available with protective casing

