


HAND PUMPS

P SERIES

- ▮ Suitable for use with both single- and double-acting hydraulic cylinders
- ▮ P352-, P1000-, P2301-, P4301-, and P8701 models feature a two-speed function that significantly enhances performance
- ▮ Internal overpressure valve
- ▮ External pressure relief valve
- ▮ Wide selection of pumps with different tank sizes to match cylinder size requirements
- ▮ P352- and P1000 models are equipped with aluminum reservoirs, making them lightweight and ideal for portable use
- ▮ Maximum working pressure: 700 bar
- ▮ Gauges, hoses, and other pump accessories
- ▮ The series also includes the P571FP foot-operated pump

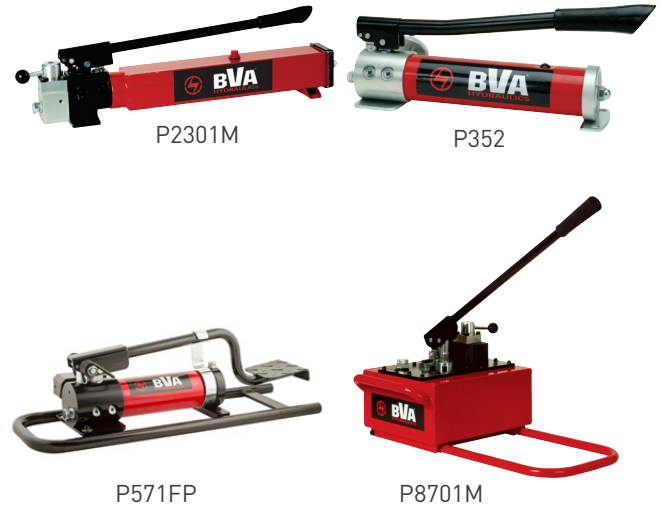

Item	Oil capacity cc	Stage 1		Stage 2		Handle operating force N	Piston stroke mm	Oil outlet port	Dimensions L x P x K mm	Weight kg
		Pressure bar	Oil displacement per stroke cc	Pressure bar	Oil displacement per stroke cc					
Single speed - Single acting										
P601S	600	-	-	700	2,5	485	20	3/8"-18NPTF	148 x 506 x 160	6
2-Speed - Single acting (Aluminium)										
P350*	350	14	3	700	0,8	391	10	1/4"-18NPTF	98 x 360 x 160	3
P352	352	14	3	700	0,8	391	10	3/8"-18NPTF	98 x 360 x 160	3
P1000	1 000	14	13,3	700	2,3	440	21	3/8"-18NPTF	124 x 584 x 175	6
2-Speed - Single acting										
P1201	1 100	14	13,3	700	2,3	440	21	3/8"-18NPTF	135 x 586 x 182	9
P2301	2 200	14	13,3	700	2,3	440	21	3/8"-18NPTF	135 x 609 x 173	13
P2801	2 870	30	46	700	3,9	468	27	3/8"-18NPTF	135 x 674 x 183	14
P4301	4 100	14	13,3	700	2,3	440	21	3/8"-18NPTF	160 x 586 x 195	17
P8701	7 800	20	126,3	700	4,8	636	43	3/8"-18NPTF	388 x 771 x 295	35
2-Speed - Double acting										
P2301M	2 200	14	13,3	700	2,3	440	21	3/8"-18NPTF	135 x 693 x 173	15
P2801M	2 700	14	13,3	700	2,3	440	21	3/8"-18NPTF	135 x 724 x 183	15
P4301M	4 100	14	13,3	700	2,3	440	27	3/8"-18NPTF	130 x 619 x 196	19
P8701M	7 800	20	126,3	700	4,8	636	43	3/8"-18NPTF	388 x 771 x 295	35
Foot pump										
P570FP	500	13,9	13	690	2	566	21	3/8"-18NPTF	195 x 610 x 186	8,2

*) CA3814 not included. Needs to be ordered separately.