

SPREADERS


BVA spreaders are suitable for a variety of applications, such as flange spreading, lifting, and machine alignment.

- Designed for use in difficult and confined spaces
- Spring return for easy operation



SR10

Item	Capacity tn	Oil capacity cc	Dimensions mm					Weight kg
			A	B	C	D	E	
SR05	0.5	10	90	192	13	52	60	2,2
SR10	1	14	99	167	12	55	56	2,3



FLANGE SPREADERS




- Designed for heavy duty industrial environment
- Adjustable jaw width for a wide range of applications and easy use
- Spare wedge attachment is included

Item	Capacity tn	Oil capacity cc	Stroke mm	Max flange thickness (mm)
HFS05	5	16	25	51 x 58
HFS10	10	74	51	51 x 91



Item	Power source	Oil capacity cc	Max. spread force (kN)	Max. spread distance (mm)	Min. spread distance (mm)	Width (mm)	Weight kg
MFSS08	Mechanical	-	78	61 (80*)	6	60	6,2
HFSS14	Hydraulic	74	143	61 (80*)	6	60	10,2
HFVW16	Hydraulic	74	143	52	10	60	8,9


*] Using CFSS02 stepped blocks

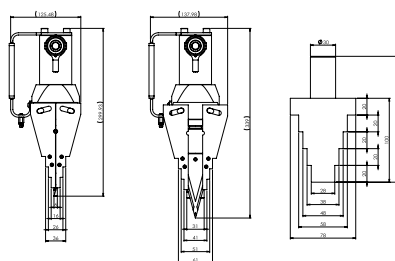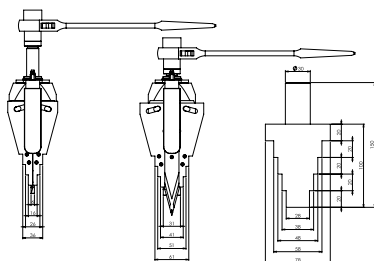

MFSS08



HFSS14



CFSS02