

PNEUTORQUE PTS SERIES


PNEUMATIC TORQUE WRENCHES

Norbar PTS series are durable, pneumatically operated torque wrenches that are single-speed tools. Their development has focused primarily on the characteristics of the air motor. PTS-series wrenches feature an air motor specifically designed and manufactured for high-torque wrench applications. Combined with Norbar's high-quality torque multiplier manufactured in England, the result is a torque wrench that offers an unmatched price-to-quality ratio.

- Excellent power-to-weight ratio
- Extremely lightweight, up to 2.5 kg lighter than previous models in the same category
- Smooth and even torque output
- Convenient direction change in tight spaces
- ±5% repeatability accuracy in the 20-100% torque range
- Exhaust air directed through the handle for user comfort
- Externally adjustable torque
- Exceptionally fast operation compared to single-speed wrenches
- Extremely durable – non-impact mechanism means no vibration or noise issues
- Uses the same Norbar torque multiplier as PTM and EvoTorque 2 series, allowing compatibility with the same accessories across all models. Extensive range of available accessories.
- Extremely quiet – 77 dB(A)
- Wrenches are delivered with a calibration certificate



PTS-72

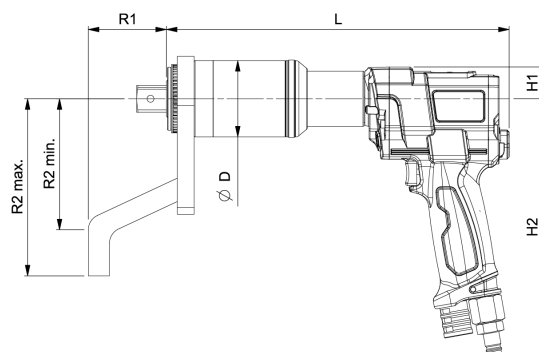

Model	Item	Dimensions mm							Drive	Torque Range Nm	Free Speed rpm	Weight kg	Reaction Arm kg
		ØD	H1	H2	L	R1	R2 min.	R2 max.					
PTS-52													
PTS-52-500	180241.B06	52	30	243	264	59	71	131	3/4"	100 - 500	35,5	4,2	0,9
PTS-52-800	180242.B06	52	30	243	264	59	71	131	3/4"	160 - 800	25,7	4,2	0,9
PTS-68													
PTS-68-2000	181454	68	30	243	285	74	120	165	1"	400 - 2 000	9,2	5,4	1,1
PTS-72													
PTS-72-1000	180243.B06	72	30	243	292	76	124	167	3/4"	200 - 1 000	20,4	6,2	1,4
PTS-72-1350	180244.B08	72	30	243	292	76	124	167	1"	270 - 1 350	14,7	6,2	1,4
PTS-80													
PTS-80-2700	180246.B08	80	30	243	291	76	124	167	1"	540 - 2 700	7,3	6,2	1,4
PTS-92													
PTS-92-4000	180250.B08	92	30	243	343	70	125	175	1"	800 - 4 000	5,3	8,6	2,5
PTS-92-4000	180250.B12	92	30	243	343	70	125	175	1 1/2"	800 - 4 000	5,3	8,6	2,5
PTS-119													
PTS-119-6000	180248.B12	119	30	243	369	90	162	210	1 1/2"	1 200 - 6 000	2,6	12,5	3,8
PTS-119-7000	180249.B12	119	30	243	369	90	162	210	1 1/2"	1 400 - 7 000	2,6	12,5	3,8