


SHCS WASHER

The popular HYTORC Washers are also available for socket head cap screws (SHCS). Say goodbye to reaction arms and searching for support points. When using Washers with Washer Drivers, you take support directly from the washer, eliminating pinch point risks and making your bolting job safer.

Bolt Size	Hex Bit Size (mm)	Item	Ø OD (mm)	Ø ID (mm)	Ø DB (mm)	Ø CD (mm)	T (mm)
M16	14	ZRW010-M16-SHCS	28,4	16,6	24,9	17,9	3,1
M18	14	ZRW-M18-SHCS	31,0	19,0	26,9	20,5	3,1
M20	17	ZRW-M20-SHCS	36,4	20,8	29,2	22,6	3,1
M22	17	ZRW-M22-SHCS	37,0	22,8	33,0	24,6	3,3
M24	19	ZRW-M24-SHCS	40,6	24,8	36,1	26,6	3,3
M27	19	ZRW-M27-SHCS	47,4	28,4	40,9	30,7	3,8
M30	22	ZRW-M30-SHCS	52,2	31,2	45,7	33,8	4,3
M33	24	ZRW-M33-SHCS	58,6	34,3	52,1	36,7	4,8
M36	27	ZRW-M36-SHCS	63,3	37,3	55,6	39,4	4,8
M42	32	ZRW-M42-SHCS	74,4	44,0	64,5	45,6	4,8

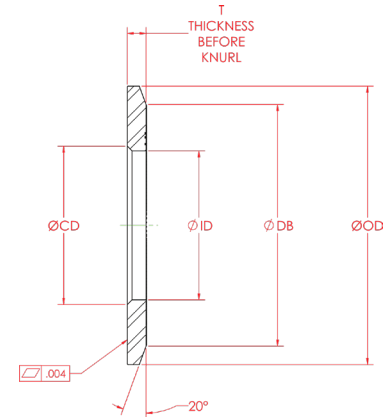

SHCS WASHER DRIVER

Drive	Bolt Size	Item	Hex Bit Size (mm)
3/4"	M16	DZAK-SHCS-M16X	14
3/4"	M18	DZAK-SHCS-M18X	14
3/4"	M20	DZAK-SHCS-M20X	17
3/4"	M22	DZAK-SHCS-M22X	17
3/4"	M24	DZAK-SHCS-M24X	19
3/4"	M27	DZAK-SHCS-M27X	19
3/4"	M30	DZAK-SHCS-M30X	22
3/4"	M33	DZAK-SHCS-M33X	24
3/4"	M36	DZAK-SHCS-M36X	27
1"	M27	DZAL-SHCS-M27X	19
1"	M30	DZAL-SHCS-M30X	22
1"	M33	DZAL-SHCS-M33X	24
1"	M36	DZAL-SHCS-M36X	27
1"	M42	DZAL-SHCS-M42X	32
1 1/2"	M42	DZAM-SHCS-M42X	32
1 1/2"	M42	DZAP-SHCS-M42X	32

